

# ABB Enclosed Breakers TMax Range

## Enclosed Tmax Breakers

ABB offers a complete range of enclosed breakers with ratings up to 1200A. Three options are available to meet all market requirements:

### Option 1: Enclosures and Kits


ABB offers the possibility to select NEMA1 CSA certified enclosure, circuit-breaker and optional accessories (neutral kit, auxiliary contact, alarm contact, shunt trip or undervoltage release) to be assembled to suit a multitude of application needs <sup>(1)</sup>.

### Option 2: Service Entrance Enclosed Breakers

ABB offers a complete range of service entrance rated enclosed breakers in NEMA 1, 12, 3R, 4 or 4X enclosures.

### Option 3: Customized Enclosed Breakers Option

ABB offers a complete range of enclosed breakers in NEMA 1, 12, 3R, 4 or 4X enclosure and a variety of options.

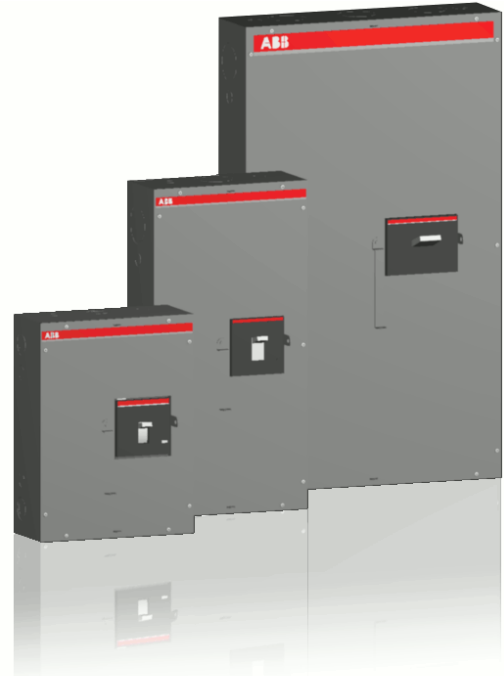

### Option 1: Enclosures and Kits <sup>(1)</sup>

Enclosures and Neutral Kits						
Breaker Type	Enclosure Part Number <sup>(2)</sup>	Maximum Amperage	Approximate Dimension Height x Width x Depth - Inches	Neutral Kit Part Number	Neutral Max. Amp. (100% rated)	Neutral Wire Range
T1, T2 and T3	EB1-T1-2-3-100	100A	16" x 12" x 5"	SNT4-100	100A	14 AWG - 1/0 AWG
T3	EB1-T3-225	225A	26" x 12" x 5"	SNT4-150 SNT4-225	150A 225A	2 AWG - 4/0 AWG 4 AWG - 300 kcmil
Ts3	EB1-Ts3-100	100A	16" x 12" x 5"	SNT4-100	100A	14 AWG - 1/0 AWG
	EB1-Ts3-225	225A	26" x 12" x 5"	SNT4-150 SNT4-225	150A 225A	2 AWG - 4/0 AWG 4 AWG - 300 kcmil
T4	EB1-T4-250	250A	36" x 20" x 5"	SNT4-100 SNT4-150 SNT4-225 SNT4-250	100A 150A 225A 250A	14 AWG - 1/0 AWG 2 AWG - 4/0 AWG 4 AWG - 300 kcmil 6 AWG - 350 kcmil
T5	EB1-T5-400	300A 400A	36" x 20" x 5"	SNT5-300 SNT5-400	300A 400A	250 kcmil - 500 kcmil 2x 3/0 - 2x 250 kcmil
T6	EB1-T6-800	800A	48" x 22" x 6.15"	SNT6-600 SNT6-800	600A 800A	2x 250 kcmil - 2x 500 kcmil 4x 250 kcmil - 4x 500 kcmil
T7	EB1-T7-1200	1200A	48" x 22" x 6.15"	SNT7-1200	1200A	4x 250 kcmil - 4x 500 kcmil


The following accessories can also be installed (for ordering information and accessories compatibility, please refer to Tmax main catalog.):

- Auxiliary contact
- Alarm contact
- Shunt trip
- Undervoltage release

<sup>(1)</sup> All electrical work shall be performed by qualified personnel and conform to all applicable safety codes. - Service entrance not available

<sup>(2)</sup> Does not include circuit-breaker. Order breaker as a separate item.


## Option 2: Service Entrance Enclosed Breakers <sup>(1)</sup>

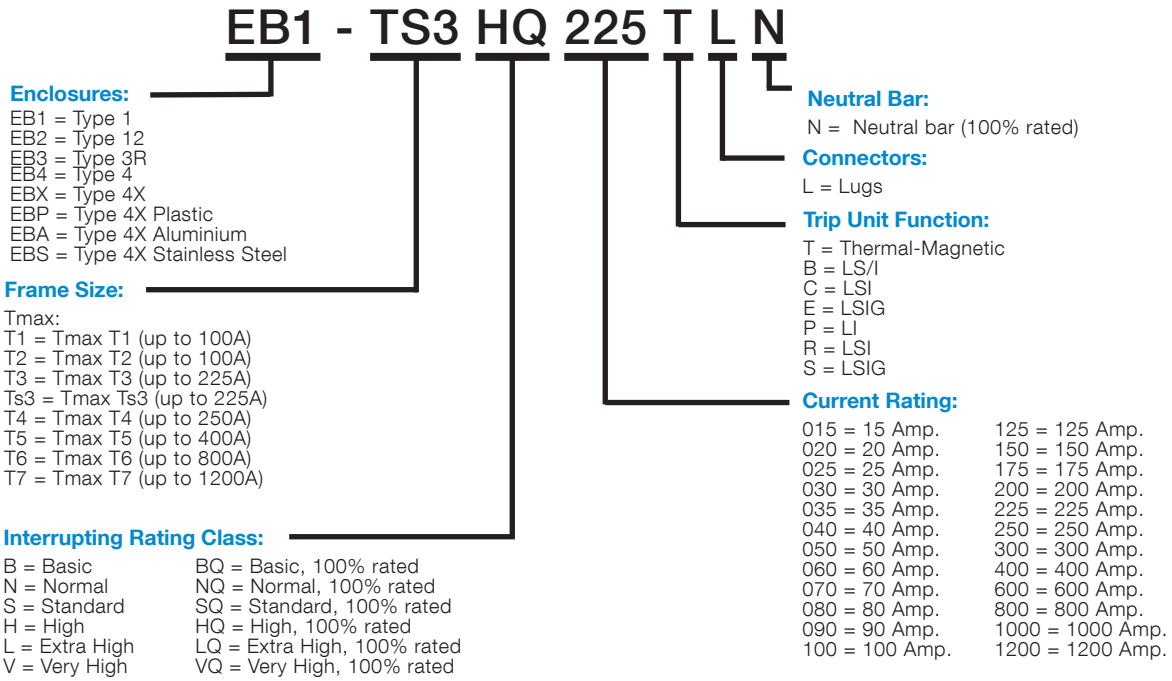

1SXP210002L0201 - June 2014

<sup>(1)</sup> Factory assembled only.

## Option 3: Customized Enclosed Breakers <sup>(1) (2)</sup>

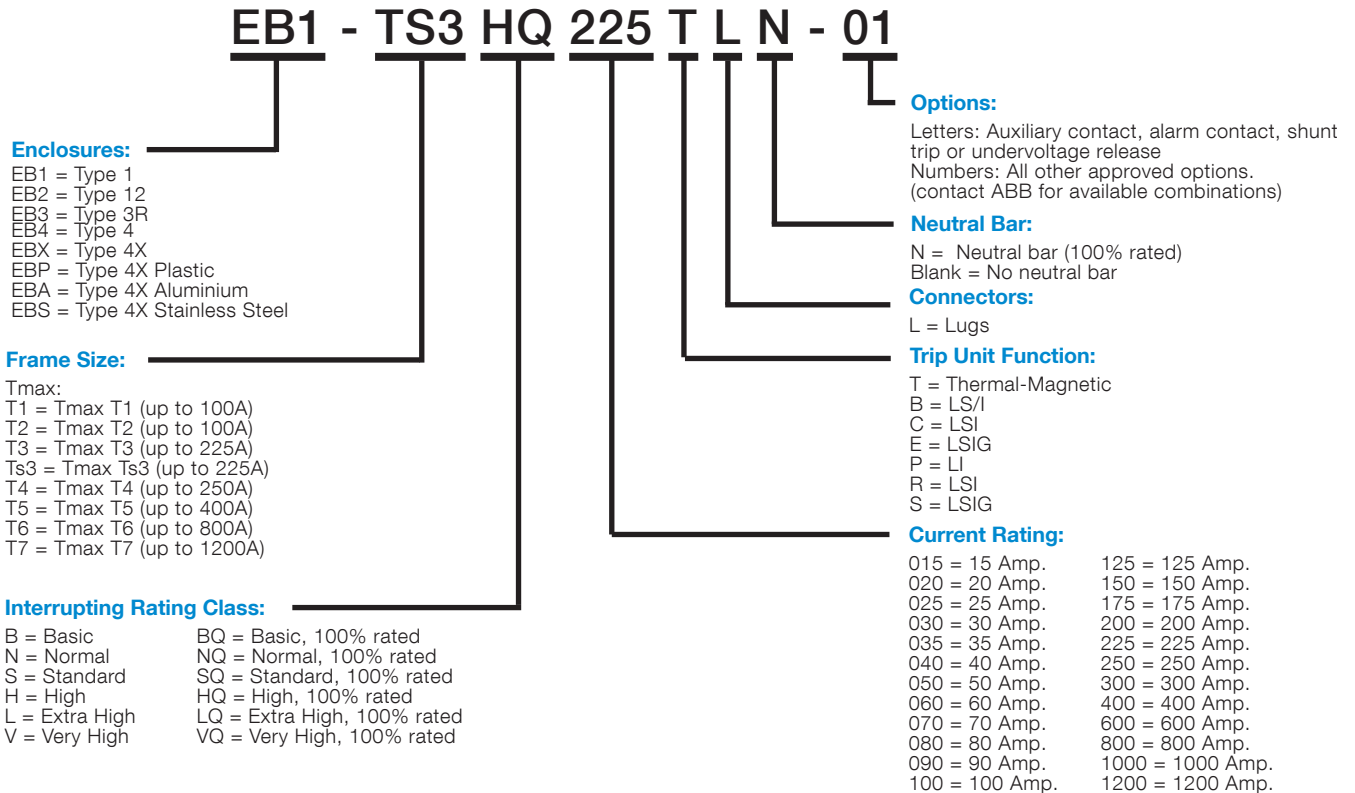

For more information please contact:

### ABB Inc.

Low Voltage Products  
 2117 32nd Avenue  
 Lachine QC H8T 3J1  
 Canada

Tel.: 1-800-567-0283

Technical support: lvp.support@ca.abb.com

Web: [www.abb.ca/lowvoltage](http://www.abb.ca/lowvoltage)

<sup>(1)</sup> Factory assembled only.

<sup>(2)</sup> Service entrance rated not available.